



QUERY

[Click Here](#)



PROFESSIONAL POWER TOOLS SERIES 2026

Engineered for Indian Industry



Precision. Power. Performance.

Why KAMARTA?



100% Compliant
Safety Standards



High-Grade Copper Armatures
for Heavy Duty Cycles



Rapid Service Turnaround
& Spare Part Availability



Our Product Range



Marble Cutter



Electric Blowers



Power Drill



Angle Grinder



Heat Gun



Cut Off Machine MC14

[Detailed Specifications →](#)



HEAVY DUTY MARBLE CUTTER

ACM - 04



BIS Certified

Rated Power Input	1050 W
No-Load Speed	12000 RPM
Blade Diameter	110 mm (4-3/8")
Net Weight	2.8 kg
Voltage	220-240V ~ 50Hz

Key Advantages

- ✓ **High-Torque Motor:** Optimized for fast cutting in hard stone.
- ✓ **Dust Proof Switch:** Enhanced longevity in dusty construction environments.
- ✓ **Ergonomic Grip:** Textured handle for stable control during vertical cuts.



Marble



Tiles



Masonry



PROFESSIONAL MARBLE CUTTER

AI CM-04



BIS Certified



Rated Power Input	1250 W
Blade Diameter	100 mm (1")
No-Load Speed	12000 RPM
Net Weight	4.0 kg
Switch Type	Slide Switch

Key Advantages

- ✓ **High-Power Output:** 1250W motor provides increased torque for cut cutting cutting thicker granite tonouts comparec omacrets.
- ✓ **Dual Blade Capacity:** Versatile uports both 100mm and 125 blades.
- ✓ **V3 Premium Bearings:** Upgraded 2RS V3 bearings ensure smoother operation at high RPMs standard models.
- ✓ **ISI Certified:** Includes 0.5 sq mm ISI Copper Cord for guarnetrical safety.



100-125mm Granite/Stone Concrete Capacity



INDUSTRIAL MARBLE CUTTER

ACM-05



BIS Certified

Rated Power Input	1750 W (Maximum Power)
No-Load Speed	12000 RPM
Blade Capacity	125 mm (5 Inch)
Rated Amperage	3.0 Amp (High Torque)
Net Weight	2RS V3 (Heavy Duty)

Key Advantages

- **Extreme Power:** Massive 1750W motor delivers 3.0 Amps of current, designed to cut through the hardest materials without stalling.
- **Extended Capacity:** 125mm blade guard allows for deeper cuts compared to standard 110mm models.
- **Industrial Durability:** Built with PA6-GF30% reinforced body to withstand high heat and vibration during continuous heavy use.
- **Premium Bearings:** Equipped with top-tier 2RS V3 bearings for maximum stability under high-load conditions.
- **Electrical Safety:** 0.5 sq mm ISI Copper wire ensures safe power transmission.
- **Safety Standard:** Fitted with 0.5 sq mm ISI Copper cord.



Heavy Stone Cutting Road/Pavement



MARBLE CUTTER SPECIFICATION SUMMARY

Quick Reference for Orders & Inventory

Feature	ACM-04 (Standard)	AI CM-04 (Professional)	ACM-05 (Heavy Duty)
Rated Power	1050 W	1250 W	1750 W
Blade Capacity	110 mm	100 - 125 mm	125 mm
Amperage	1.8 Amp	1.8 Amp	3.0 Amp
No-Load Speed	12000 RPM	12000 RPM	12000 RPM
Net Weight	3.40 KG	4.00 KG	3.75 KG
Bearing Type	2RS V2	2RS V3	2RS V3
Body Material	PA6-GF30%	PA6-GF30%	PA6-GF30%
Warranty	18 Months	18 Months	18 Months
Ideal Application	Tiles & Standard Masonry	Granite & Concrete	Heavy Stone & Industrial Use

Purchase today from our website or contact your regional distributor for bulk pricing.



COMPACT ELECTRIC BLOWER

MPB 40



Rated Power Input	335 W
Air Volume	2.3 m ³ /min
No-Load Speed	13000 RPM
Net Weight	1.7 kg (Approx)
Function	Blowing Only

Key Advantages

- ✓ **High-Velocity Output:** Delivers strong airflow for dislodging heavy dust.
- ✓ **Lock-On Button:** Reduces finger fatigue during continuous operation.
- ✓ **Lightweight Design:** Easy one-handed operation.
- ✓ **Durable Impeller:** High-quality plastic fan designed to resist breakage.



Electronics
Cleaning



Garden/
Outdoor



Industrial
Dust Removal

COMPACT AIR BLOWER

EG-40



Rated Power Input	500 W
No-Load Speed	11000 RPM
Air Flow Rate	3.2 m ³ /min
Rated Amperage	2.2 Amp
Net Weight	1.4 KG (Ultra Lightweight)
Body Material	PP (Polypropylene)
Bearing Type	2RS V2

- ✓ **Ultra-Lightweight:** At just 1.4 KG, this is the lightest blower in the series, perfect for one-handed home and office use.
- ✓ **Energy Efficient:** 500W motor provides sufficient power for dusting without excessive energy consumption.
- ✓ **Compact Design:** Small form factor allows for easy storage and maneuvering in tight spaces (like computer cabinets).
- ✓ **Safe Operation:** Includes 0.5 sq mm ISI Copper cord for reliable electrical safety.
- ✓ **Value Choice:** An excellent entry-level solution for general cleaning tasks.



PC Cleaning



Home Dusting



Light Garden Use

Jse



Feature	Specification
Rated Power Input	550 W
No-Load Speed	11000 RPM
Air Flow Rate	3.2 m ³ (MTR) ³
Rated Amperage	2.2 Amp
Net Weight	1.6 KG
Body Material	PP (Polypropylene)
Bearing Type	2RS V2

Key Advantages


- ✓ **Enhanced Power:** Upgraded 550W motor delivers stronger continuous airflow for cleaning workshops and garages.
- ✓ **Balanced Weight:** At 1.6 KG, it offers a solid feel without causing operator fatigue during extended use.
- ✓ **Durable Construction:** Built with high-quality Polypropylene (PP) for resistance to minor impacts and scratches.
- ✓ **Standard Safety:** Equipped with 0.5 sq mm ISI Copper cord ensuring stable current flow.
- ✓ **Reliable Performance:** Designed for a 3-year durability cycle with consistent output.



Workshop Cleaning



Garage/Patio



General Dusting

UNB-88



Feature	Specification
Rated Power Input	550 W
No-Load Speed	11000 RPM
Air Flow Rate	3.2 m ³ (MTR) ³
Net Weight	1.8 KG (Heavy Duty Build)
Body Material	PA6-GF30% (Glass Fiber Reinforced)
Bearing Type	2RS V2

Key Advantages

-  **Industrial Grade Body:** Constructed with PA6-GF30% (30% Glass Fiber), providing superior resistance to heat, drops, and impact compared to standard plastic.
-  **Stable Operation:** Heavier 1.8 KG build reduces vibration, offering a steady grip during precision cleaning.
-  **Consistent Power:** 2.2 Amp motor ensures reliable airflow for clearing metal shavings and sawdust.
-  **Site Ready:** Designed to withstand the rough handling typical of construction and industrial environments.
-  **Certified Safety:** Includes 0.5 sq mm ISI Copper cord.





VARIABLE SPEED BLOWER

AMV-88



Feature	Specification
Rated Power Input	550 W
Speed Control	Variable (Dial/Trigger)
No-Load Speed	0 - 11000 RPM
Air Flow Rate	3.2 m ³ (MTR) ³
Net Weight	1.6 KG
Body Material	PP (Polypropylene)

Key Advantages

- ✔ **Precision Speed Control:** Features a variable speed dial, allowing users to adjust airflow for delicate tasks (like cleaning motherboards) without damaging components.
- ✔ **Versatile Performance:** Seamlessly transition from low-speed dusting to high-speed debris removal.
- ✔ **Ergonomic Handling:** Balanced 1.6 KG weight reduces wrist strain during detailed cleaning work.
- ✔ **Durable Motor:** 2.2 Amp motor designed to handle frequent speed changes without overheating.
- ✔ **Safety Standard:** Fitted with 0.5 sq mm ISI Copper cord.



HGV AI-40



Feature	Specification
Rated Power Input	650 W (High Power)
No-Load Speed	11000 RPM
Air Flow Rate	3.2 m ³ (MTR) ³
Net Weight	1.800 KG
Body Material	PPGF30% (Glass Fiber Reinforced)
Bearing Type	2RS V3

Key Advantages

- ✓ **High-Power Performance:** Upgraded 650W motor delivers significantly more thrust than standard 500W models for stubborn debris.
- ✓ **Reinforced Housing:** Body built with PPGF30% (Polypropylene Glass Fiber) for enhanced structural integrity and heat resistance.
- ✓ **Stable Operation:** 1.8 KG weight provides a solid, balanced feel, reducing vibration during high-RPM operation.
- ✓ **Premium Bearings:** Equipped with 2RS V3 bearings for smoother rotation and longer motor life.
- ✓ **Safety First:** Includes 0.5 sq mm ISI Copper cord.



AI 007




Feature	Specification
Rated Power Input	650 W
No-Load Speed	11000 RPM
Air Flow Rate	3.2 m ³ (MTR) ³
Net Weight	1.8 KG
Body Material	PPGF30% (Reinforced Polypropylene)
Bearing Type	2RS V3 (Sealed)

Key Advantages

- ✔ **Powerful Output:** 650W motor generates strong air pressure, ideal for dislodging stuck dust in deep crevices.
- ✔ **Reinforced Durability:** Built with PPGF30% composite to resist thermal deformation during extended operation.
- ✔ **Stable Bearing System:** V3 Sealed Bearings reduce friction and noise, ensuring smooth power delivery.
- ✔ **Ergonomic Balance:** Designed for comfort during repetitive industrial cleaning tasks.
- ✔ **Electrical Safety:** Fitted with 0.5 sq mm ISI Copper cord.



Data Centers



Ventilation Cleaning



Sawdust Removal



PREMIUM INDUSTRIAL BLOWER

HNL AI-40

Feature	Specification
Rated Power Input	650 W
No-Load Speed	11000 RPM
Air Flow Rate	3.2 m ³ (MTR) ³
Net Weight	2.0 KG (Solid Build)
Body Material	PA6-GF30% (Reinforced Nylon)
Warranty	1 Year (Extended Coverage)

Key Advantages

- 
Extended Service Life: Engineered for a 5-year operational durability cycle, significantly outlasting standard blowers.
- 
Premium Body Material: Constructed with PA6-GF30% (Nylon 6 + 30% Glass Fiber) for maximum resistance to heat and chemical oils.
- 
Heavy-Duty Components: The 2.0 KG weight reflects the use of oversized copper armatures and heavy-duty stators.
- 
1-Year Warranty: Backed by a comprehensive **18 month warranty** on Armature and Field Coil.
- 
Superior Bearings: Uses high-grade 2RS V3 bearings to minimize wear during prolonged operation.



Continuous Industrial Use



Textile Mills



Construction Sites



Feature	Specification
Rated Power Input	850 W (Maximum Series Power)
Air Flow Rate	4.0 m ³ /min (Highest in Class)
No-Load Speed	13000 RPM
Rated Amperage	3.3 Amp (High Torque)
Net Weight	2.5 KG (Heavy Industrial Build)
Warranty	1 Year (Extended Coverage)

Key Advantages

- 
Ultimate Power: Massive 850W motor generates a class-leading 4.0 m³/min airflow, capable of blowing wet leaves and heavy industrial waste.
- 
Heavy-Duty Construction: Weighing 2.5 KG, this unit is built with oversized copper coils and a reinforced PP-GF30% body for maximum ruggedness.
- 
High-Torque Performance: Draws 3.3 Amps to maintain speed even under heavy load conditions.
- 
Extended Warranty: “Our 18 month warranty” reflecting confidence in its industrial durability.
- 
Premium Components: Equipped with top-tier 2RS V3 bearings and 0.5 sq mm ISI Copper cord.





AIR BLOWER SELECTION GUIDE

From Compact Cleaning to Industrial Heavy Duty

Model	Power	Air Flow (m ³ /min)	Speed (RPM)	Weight	Body Material	Special Feature
MPB-40	335 W	2.3 m ³	13000	1.7 KG	Standard	Compact Entry Level
EG-40	500 W	3.2 m ³	11000	1.4 KG	PP	Ultra-Lightweight
AM-88	550 W	3.2 m ³	11000	1.6 KG	PP	Standard Duty
UNB-88	550 W	3.2 m ³	11000	1.8 KG	PA6-GF30%	Reinforced Body
AMV-88	550 W	3.2 m ³	0-11000	1.6 KG	PP	Variable Speed
HGV AI-40	650 W	3.2 m ³	11000	1.8 KG	PP-GF30%	High Power Standard
AI 007	650 W	3.2 m ³	11000	1.8 KG	PP-GF30%	High Performance
HNL AI-40	650 W	3.2 m ³	11000	2.0 KG	PA6-GF30%	5-Year Durability
Kamarta -0040	850 W	4.0 m ³	13000	2.5 KG	PP-GF30%	Flagship Power

For Home/Office: EG-40 or MPB-40 (Lightweight & Efficient). **For Electronics:** AMV-88 (Variable speed prevents damage to components).

For Industry: HNL AI-40 (Longest life) or Kamarta -0040 (Maximum power).



COMPACT IMPACT DRILL

AM-13B

Feature	Specification
Rated Power Input	450 W
Chuck Capacity	13 mm (1/2 Inch)
No-Load Speed	2500 - 3000 RPM
Impact Rate	48000 BPM (High Impact)
Net Weight	1.800 KG
Body Material	PA6-GF30% (Reinforced)

Key Advantages

- ✓ **Dual Functionality:** Switch easily between "Rotary Mode" for wood/metal and "Impact Mode" for masonry drilling.
- ✓ **High Impact Rate:** Delivers 48,000 blows per minute (BPM) for fast penetration into brick and light concrete.
- ✓ **Reinforced Body:** Constructed with PA6-GF30% (Glass Fiber Reinforced) to withstand vibration and job site abuse.
- ✓ **Smooth Operation:** Equipped with premium 2RS V3 bearings for stable, wobble-free drilling.
- ✓ **Electrical Safety:** Fitted with 0.5 sq mm ISI Copper cord.



ID-10 / ID-13



BIS Certified



Feature	Model ID-10	Model ID-13
Rated Power	550 W	600 W
Chuck Capacity	10 mm	13 mm
No-Load Speed	2700 RPM	1800 RPM
Impact Rate	43,200 BPM	28,800 BPM
Net Weight	1.8 kg	2.0 kg

Key Advantages

- ✓ **Dual Function Switch:** Seamless toggle between rotary drilling (wood/metal) and impact drilling (concrete).
- ✓ **Variable Speed & Reverse:** Precise control for screwdriving and delicate drilling.
- ✓ **Ergonomic Design:** Soft-grip handle reduces vibration during impact usage.
- ✓ **Heavy-Duty Chuck:** Ensures bit retention during high-torque applications.



Wood



Metal



Light Masonry

Standard Professional Drill & Polisher

KAMARTA AM SERIES



Drill Config (10/13mm)

Polisher Config

Feature	Specification
Rated Power Input	650 W
Function Type	Multi-Speed Drill / Polisher
RPM Settings	1250 / 2250 / 2900 RPM (3-Speed)
Chuck Capacity	10mm or 13mm (Drill Variant)
Net Weight	2.500 KG
Body Material	PA6-GF30% (Reinforced)

Key Advantages


- ✓ **3-Speed Gearbox:** Mechanical gear selection allows for high torque at low speeds (polishing/large hole drilling) and high speeds for small bits.
- ✓ **Dual Application:** Versatile design serves as a powerful hand drill or a dedicated surface polisher depending on the attachment.
- ✓ **Heavy-Duty Build:** Weighing 2.5 KG with a reinforced PA6-GF30% body, built for sustained industrial use.
- ✓ **Consistent Power:** 650W motor maintains selected RPM under load for uniform polishing finishes.
- ✓ **Electrical Safety:** Fitted with 0.5 sq mm ISI Copper cord.



Metal/Wood Drilling



Automotive Polishing



Multi Speed Gearbox

Premium Heavy Duty Drill & Polisher

KAMARTA AI SERIES



Drill Config (10/13mm)



Polisher Config


Feature	Specification
Rated Power Input	650 W
Function Type	Multi-Speed Drill / Polisher
RPM Settings	1250 / 2250 / 2900 RPM
Bearing Type	2RS V3 (High Performance)
Net Weight	2.600 KG (Solid Stability)
Body Material	PA6-GF30% (Reinforced)

Key Advantages

- 
Premium Bearing System: Upgraded with 2RS V3 bearings for reduced friction, lower noise, and significantly longer lifespan under heavy load.
- 
Superior Stability: Heavier 2.6 KG construction dampens vibration, providing a smoother finish when polishing or drilling hard metals.
- 
3-Speed Versatility: Mechanical gear switching ensures optimal torque delivery at any speed setting (Low, Medium, High).
- 
Industrial Durability: Reinforced PA6-GF30% body withstands heat and impact in tough work environments.
- 
Safety Standard: Fitted with 0.5 sq mm ISI Copper cord.



Premium V3 Bearings



3-Speed Control



Continuous Duty



PROFESSIONAL ROTARY HAMMER

MPH20




Rated Power Input	680 W
Drilling Capacity	20 mm (Concrete)
No-Load Speed	0 - 850 RPM
Impact Rate	0 - 4850 BPM
Net Weight	2.3 kg

Key Advantages

- ✓ **SDS-Plus Chuck:** Industry-standard system for rapid, secure bit changes.
- ✓ **Safety Slip Clutch:** Protects the user and motor if the bit jams in rebar.
- ✓ **Variable Speed:** Trigger-controlled speed for clean hole starting.
- ✓ **Dual Mode:** Switch easily between Rotary Drilling and Hammer Drilling.



Concrete



Brick/Masonry



Anchor Installing



DRILLING & FASTENING SERIES COMPARISON

From Precision Drilling to Heavy Duty Concrete Breaking

Model	Type	Power	Speed (RPM)	Impact / BPM	Weight	Special Feature
AM-13B	Impact Drill	450 W	2500-3000	48000 BPM	1.8 KG	High Impact Rate (Compact)
ID-10 / 13	Impact Drill	550 / 600 W	2700 / 1800	43200 / 28800	1.8 / 2.0 KG	Variable Speed & Reverse
KAMARTA AM SERIES	Drill / Polisher	650 W	1250/2250/2900	N/A	2.5 KG	3-Speed Gearbox
KAMARTA AI SERIES	Drill / Polisher	650 W	1250/2250/2900	N/A	2.6 KG	V3 Bearings & Heavy Build
MPH20	Rotary Hammer	680 W	0 - 850	0 - 4850 BPM	2.3 KG	SDS-Plus & Concrete Breaking

For Masonry/Brick: AM-13B or ID-13 (Best balance of speed and impact). **For Wood/Metal & Polishing:** AMBER or AKSHAR (High torque, no hammer action). **For Hard Concrete:** MPH20 (The only choice for drilling into reinforced concrete).

COMPACT ANGLE GRINDER

AM-801



Feature	Specification
Rated Power Input	800 W
Disc Diameter	100 mm (4 Inch)
No-Load Speed	12000 RPM
Rated Amperage	1.2 Amp
Net Weight	2.00 KG
Bearing Type	2RS V2 (Dust Sealed)

Key Advantages

- ✓ **Efficient Power:** 800W motor delivers sufficient torque for standard cutting and grinding tasks in metal workshops.
- ✓ **Lightweight Handling:** Weighing just 2.0 KG, it reduces operator fatigue during overhead or vertical grinding applications.
- ✓ **Durable Housing:** Body constructed from PA6-GF30% (Reinforced) to resist heat and impact on busy job sites.
- ✓ **Dust Protection:** Equipped with 2RS V2 sealed bearings to prevent metal dust from damaging internal components.
- ✓ **Safety Standard:** Fitted with 0.5 sq mm ISI Copper cord.



PROFESSIONAL ANGLE GRINDER


AM-AG900



Feature	Specification
Rated Power Input	900 W
Disc Diameter	100 mm (4 Inch)
No-Load Speed	12000 RPM
Rated Amperage	1.8 Amp (High Torque)
Net Weight	2.10 KG
Bearing Type	2RS V3 (Dust Sealed)

Key Advantages

- **High-Torque Motor:** 900W motor draws 1.8 Amps, providing significantly more cutting force than standard entry-level grinders.
- **Premium V3 Bearings:** Upgraded to 2RS V3 sealed bearings for superior smoothness and extended lifespan under load.
- **Optimized Cooling:** Designed with improved air vents to dissipate heat during continuous grinding sessions.
- **Solid Build:** At 2.10 KG, the heavier armature and field coil ensure stability and vibration dampening.
- **Safety Standard:** Fitted with 0.5 sq mm ISI Copper cord.



5-INCH HEAVY DUTY GRINDER

AI-801



Feature	Specification
Rated Power Input	980 W
Disc Diameter	125 mm (5 Inch)
No-Load Speed	12000 RPM
Rated Amperage	1.2 Amp
Net Weight	2.20 KG
Bearing Type	2RS V3 (High Performance)

Key Advantages

- **Extended Capacity:** 125mm (5") disc size allows for deeper cuts in thick metal pipes and stone compared to standard 4" grinders.
- **Optimized Power:** 980W motor is perfectly tuned to drive larger wheels without stalling under moderate load.
- **Heavy-Duty Bearings:** Equipped with premium 2RS V3 bearings to handle the increased radial load of a larger disc.
- **Stable Handling:** Heavier 2.2 KG body weight provides stability, reducing kickback risk during deep cutting.
- **Safety Standard:** Fitted with 0.5 sq mm ISI Copper cord.



MP100G



Rated Power Input	1000 W
Disc Diameter	100 mm (4")
No-Load Speed	11000 RPM
Net Weight	1.8 kg
Switch Type	Slide Switch

Key Advantages

- ✓ **Compact Gear Housing:** Allows operation in tight, confined spaces.
- ✓ **Spindle Lock:** Quick and easy disc changes without extra tools.
- ✓ **Optimized Airflow:** Rear exhaust cools the motor for extended usage.
- ✓ **Burst-Proof Guard:** Maximum user safety during disc failure.



Metal Grinding



Cutting



Polishing

ULTRA HIGH-POWER GRINDER

AI-AG2000



Feature	Specification
Rated Power Input	1200 W
Disc Diameter	100 mm (4 Inch)
No-Load Speed	12000 RPM
Rated Amperage	1.2 Amp (Amp (No Load))
Net Weight	2.200 KG (Heavy Duty Build)
Bearing Type	2RS V3 (Dust Sealed)

Key Advantages

- **Extreme Power Output:** Massive 1200W motor provides class-leading torque, preventing wheel stall even under extreme grinding pressure.
- **Industrial Durability:** Built with a reinforced PA6-GF30% body to withstand the high heat and physical abuse of heavy industrial sites.
- **V3 Bearing System:** Premium 2RS V3 sealed bearings ensure smooth operation and longevity at high RPMs.
- **Heavy-Duty Stability:** At 2.2 KG, the solid construction absorbs vibration, reducing operator fatigue during continuous use.
- **Safety Standard:** Fitted with 0.5 sq mm ISI Copper cord.





MARBLE CUTTER SPECIFICATION SUMMARY

Quick Reference for Orders & Inventory

Model	Power	Disc Size	Speed(RPM)	Weight	Bearing	Ideal Application
AM-801	800W	100mm(4")	12000	2.0 KG	2RS V2	Light Fabrication & Polishing
AM-AG900	900W	100mm(4")	12000	2.1 KG	2RS V3	Heavy Weld cleaning
AI-801	980W	125mm(5")	12000	2.2 KG	2RS V3	Deep Cutting & Surface grinding
MP100G	1000W	100mm(4")	11000	1.8 KG	Standard	Compact Heavy Duty Work
AI-AG2000	1200W	100mm(4")	12000	2.2 KG	2RS V3	Flagship Industrial Power

Purchase today from our website or contact your regional distributor for bulk pricing.



WIDE-RANGE HEAT GUN

AMHG-2000



Rated Power Input	2000 W
Temperature Range	220°C - 600°C
Air Flow Rate	230 / 350 (L/min)
Rated Amperage	7 AMP
Net Weight	0.75 KG
Body Material	PP-GF30%(Reinforced)

Key Advantages

High-Power Heating: 2000W element quickly reaches operating temperature for efficient workflow.

Dual Temp Control: Two-stage switch allows users to toggle between 220°C (for gentle drying/shrinking) and 600°C (for stripping paint).

Lightweight Design: At just 0.75 KG, it prevents hand fatigue during overhead or prolonged use.

Durable Housing: Body made from PP-GF30% to withstand high operating temperatures without deformation.

Safety Cord: Equipped with heavier 0.75 sq mm ISI Copper cord to handle the high current draw (7 Amp)



Paint Removal



Shrink Wrapping



PVC Bending

WIDE-RANGE HEAT GUN AIHG-2000



Rated Power Input	2000 W
Temperature Range	50°C - 650°C
Air Flow Rate	230 / 350 (L/min)
Rated Amperage	7 AMP
Net Weight	0.8 KG
Body Material	High-Heat Nylon

Key Advantages

Precision Temperature Control: Operates from as low as 50°C, making it safe for drying paint or thawing pipes without scorching the material.


Maximum Heat Output: Reaches up to 650°C for heavy-duty applications like loosening rusted bolts or stripping multiple paint layers.

Superior Material: Constructed with PA633GF (Specialized Glass-Filled Nylon), offering better heat insulation and impact resistance than standard Material .

Heavy Duty Cord: Includes 0.75 sq mm ISI Copper cord to safely manage the 2000W load.



LOW TEMP
(50°C)



ELECTRONICS
REPAIR



HEAVY STRIPPING
(650°C)

MC 14



Structural Steel



Iron Pipes



Rebar Cutting

Feature	Specification
Rated Power Input	2400 W High Power
Wheel Diameter	355 mm (14")
No-Load Speed	3900 RPM
Net Weight	18.0 kg
Base Material	Reinforced Steel

Key Advantages

- ✓ **High-Overload Motor:** 2400W armature designed to resist overheating during continuous cutting.
- ✓ **Spark Diversion Guard:** Adjustable guide plate to safely direct sparks away from the operator.
- ✓ **Quick-Release Clamp:** Fast material clamping system for improved workflow efficiency.
- ✓ **Heavy-Duty Base:** Extra-wide steel base provides maximum stability and vibration control.

ARMATURES

We offer exceptionally high-quality armatures for essential power tools like Angle Grinders, Marble Cutters, and Rotary Hammers.



Armature-6-100



Armature-p-5502



Dewalt 801



G10SS Armature



**G15SA2-5-Inch
Grinder**



KPT-5791-Cobra



LG-PD-Armature



**PD100-M-
Armature**



**Armature-CM4-
Plastic-fan**



**Armature-CM4-
SB**




LG 355 Cut Off



Armature-2-20



**HM0810-
Armature-Mini-
Breaker**

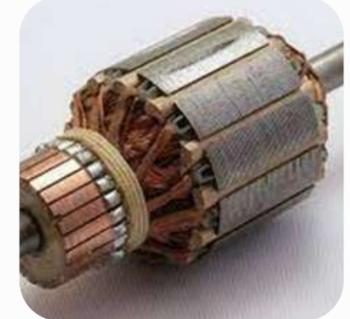

EBC-40Armature

FIELD COIL

We manufacture and supply precision-wound, high-quality Field Coils essential for maximizing the torque and sustained performance of all your power tools.



6-100 Field Coil



11-E Field Coil




20-180-Field Coil



**7614-NB-Field
Coil**



**Blower-Field Coil
EBC-40**



**CC14SF-Field
Coil**



**CC14STD Field
Coils**



CM4-Field Coil



**COBRA-5791
Field Coil**



**Field-Coil DW
801**



Field Coil G15SA2



Field Coil G18SA2




**Field Coil HM-
810**



**GCO-2000 Field
Coil**

OPERATIONAL SAFETY STANDARDS

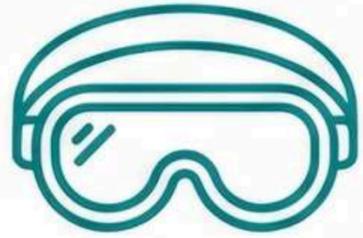


Eye Protection



Hand Protection



Dust Mask



Disconnect Power

Critical Safety Rules

- ⚠️ **1. Personal Protection:** Always wear appropriate safety gear (PPE) during operation.
- ⚠️ **2. Accessory Check:** Inspect discs and bits for cracks or damage before every use.
- ⚠️ **3. Workplace Safety:** Keep the work area clean, well-lit, and free of flammable materials.
- ⚠️ **4. Electrical Safety:** Ensure the tool is grounded and the voltage matches the rating plate (220V). Do not use in wet conditions.

WARRANTY POLICY



What is Covered:

- ✓ Manufacturing defects in the Armature and Field Coil.

What is Not Covered:

- ✗ Normal wear and tear, carbon brushes, bearings, switches, gears, and external body damage caused by misuse.

Claim Process


- 📄 1. Maintain your original purchase invoice.
- 📄 2. Do not attempt to open or repair the tool yourself (voids warranty).
- 📄 3. Nationwide Service Centers available. Visit website for the nearest location and Claim your WARRANTY COVERAGE.

To know more visit our website
<https://kamarta-robot.com/products/>




GET IN TOUCH

Industry leaders, your efficiency starts here. Experience the advantage of superior torque, ergonomic balance, and rugged design through our professional-grade tool series. By deploying BIS-certified equipment built for the toughest sites, you ensure quality that puts you years ahead of the competition. Connect with us and turn raw power into performance.

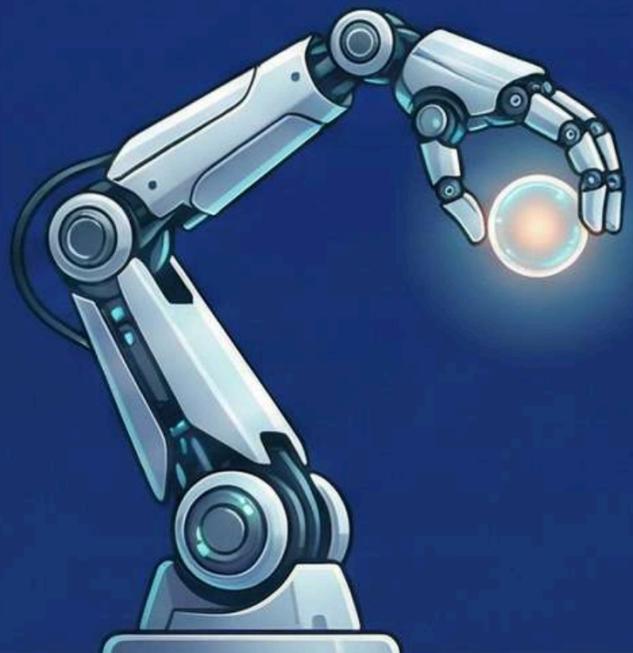

Scan to Apply



MAIL US :

support@kamarta.in



CALL US

8518-8518-46

8518-8518-48

8518-0550-55



OUR WEBSITE

kamarta-robot.com



OFFICE

SECTOR 44, GURUGRAM

&

**INDUSTRIAL AREA,
MANDIDEEP, M.P.**

CONNECT WITH US



Office hours = Monday - Friday 10 AM to 7PM (IST)

GST Registration Number = 06AAICK9102A2ZY

THANK YOU

For Choosing Precision & Power



“Engineering Excellence, Empowering Progress”



Proudly Made in India



Quality Assured



Authorized Dealers Welcome

QUERY

[Click Here](#)

